


**30 1/2"**  
**Large, INDOOR**  
**SSixx**  
(Shroud, Integral)

**Warning:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician.


These installation instructions valid with the above Ametrix styles.

**Exploded View and Part Call-out**

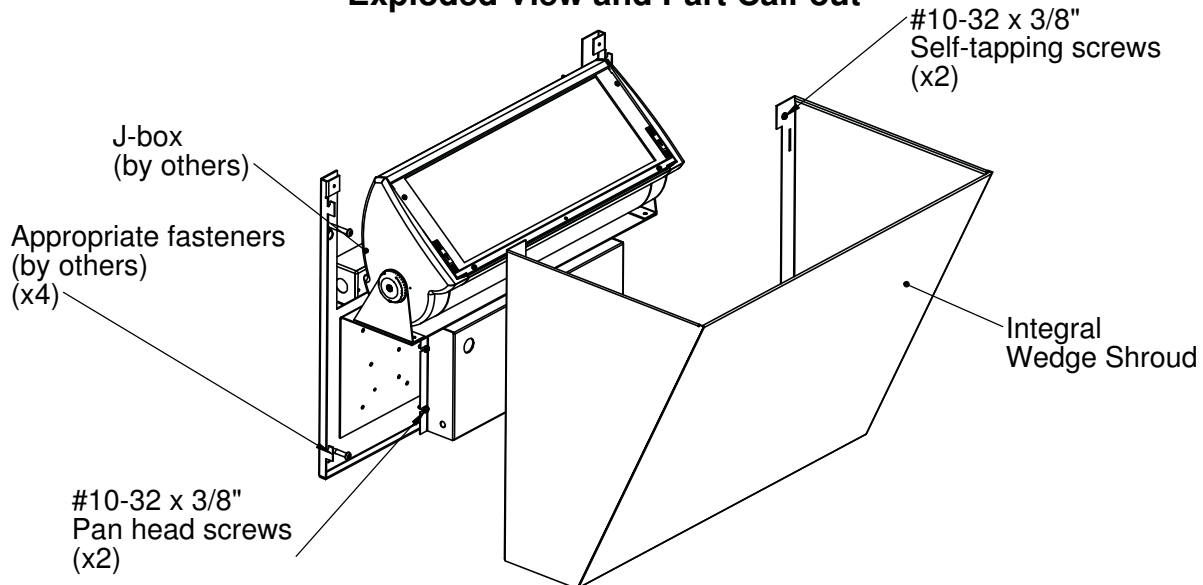


**Attention:**  
Additional bracing/ structure may be required to support fixture.

**1 Preparing Fixture for Mounting**

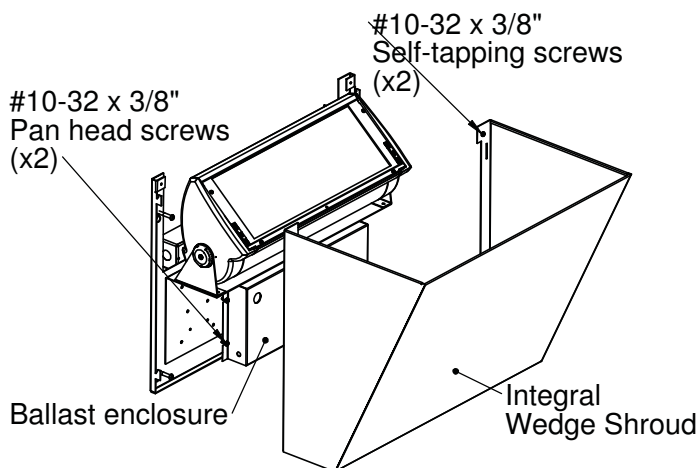


1. To mount fixture, begin by removing both #10-32 x 3/8" self-tapping screws and remove shroud.
2. Remove ballast enclosure.


**2 Mounting Fixture to Surface**

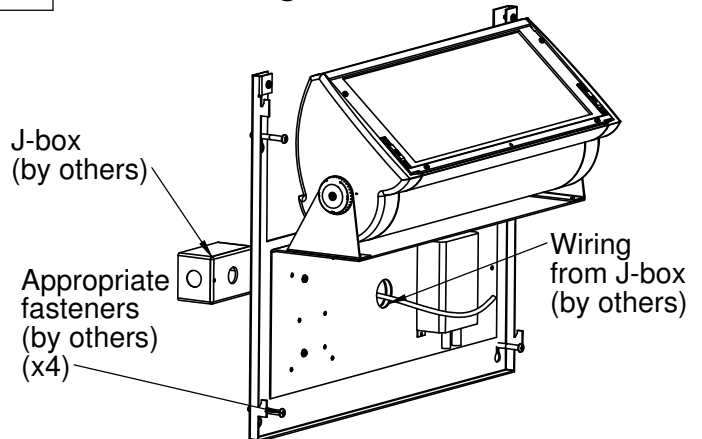


1. Feed wiring from J-box through wiring hole in fixture assembly.
2. Using appropriate fasteners, secure fixture assembly to surface. Additional bracing/structure may be required to support fixture.



Wedge Shroud 01



Round Shroud 02



Square Shroud 03


These installation instructions are valid with the above Ametrix styles

## 30 1/2" Large, INDOOR SSLxx (Shroud, Integral)

**Warning:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

**3**


### Wiring the Fixture

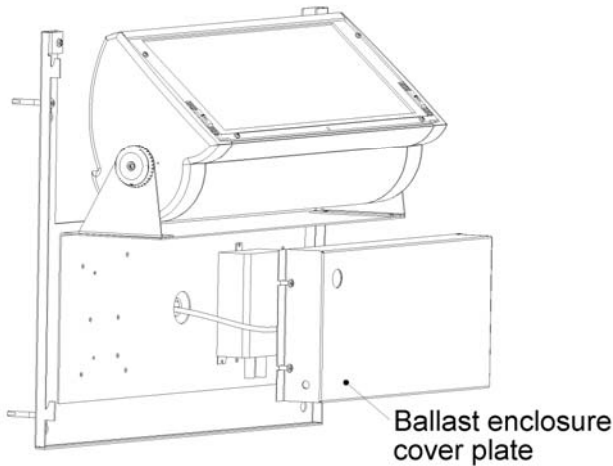

1. After securing fixture to surface, attach all wires ensuring connections are properly matched.
2. Re-secure ballast enclosure cover plate.

**4**



### Securing Shroud to Fixture

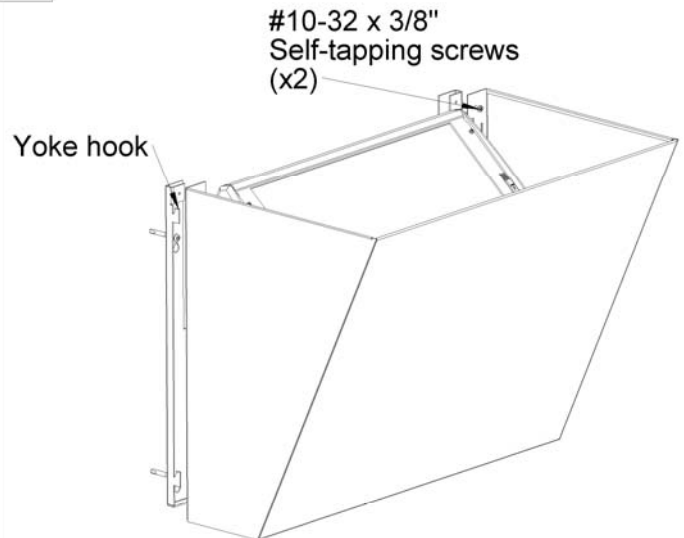


1. After wiring fixture and checking all connections, slide shroud slot over yoke hook and secure shroud using both #10-32 x 3/8" self-tapping screws.

**5**

### Aiming the Fixture

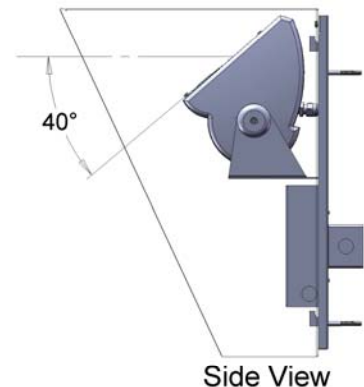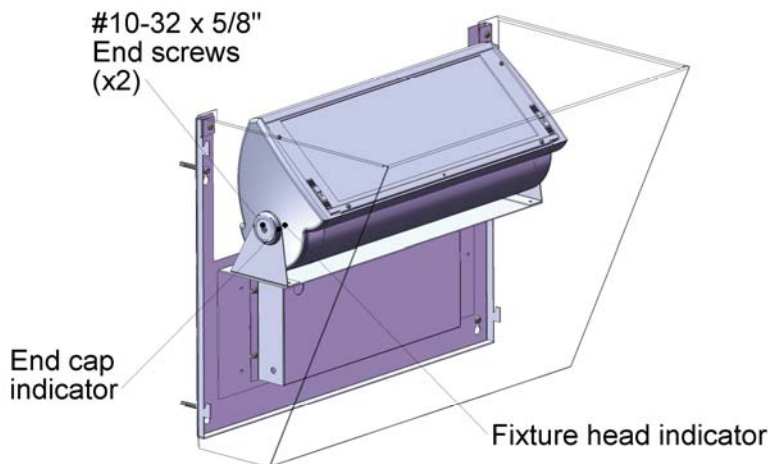

1. To aim fixture, loosen both #10-32 x 1" end screws. When the PointGrab™ system indicators are lined up, the slope of the lens face is 40-degrees. Each subsequent notch is an additional 10-degrees.
2. When the fixture head is adjusted to the desired angle, re-tighten end screws to secure the position.

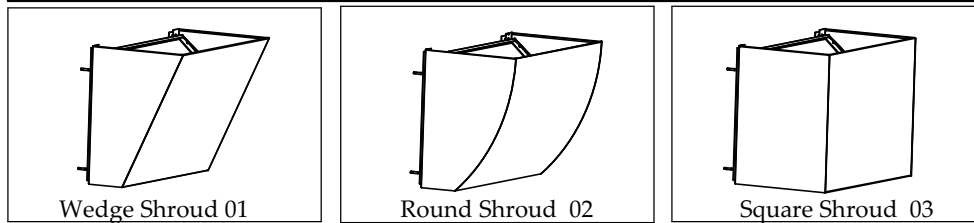


These installation instructions are valid with the above Ametrix styles

## 30 1/2" Large, INDOOR SSLxx (Shroud, Integral)

**Warning:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

### Mounting Plate Dimensions (In and mm)

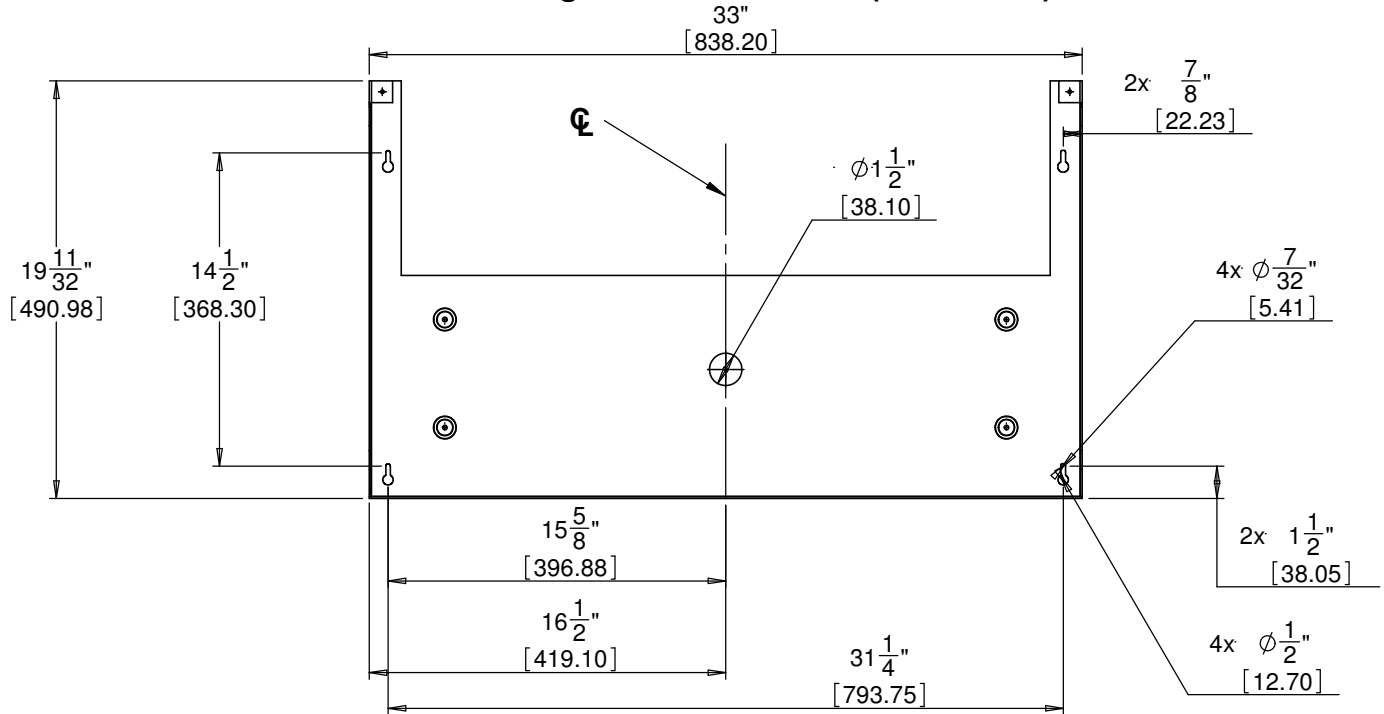

### Lamping Size Chart (lamps provided by others)

FIXTURE SIZE (inches / mm)	WATTAGE	# OF LAMPS	LAMP TYPE	LAMP DESCRIPTION
30 1/2 / 774.7	36 W	1	T5	Twin Tube
30 1/2 / 774.7	40 W	1	T5	Twin Tube
30 1/2 / 774.7	50 W	1	T5	Twin Tube
30 1/2 / 774.7	55 W	1	T5	Twin Tube
30 1/2 / 774.7	36 W	2	T5	Twin Tube
30 1/2 / 774.7	40 W	2	T5	Twin Tube
30 1/2 / 774.7	50 W	2	T5	Twin Tube
30 1/2 / 774.7	55 W	2	T5	Twin Tube
30 1/2 / 774.7	250 W	2	ET18	Metal Halide
30 1/2 / 774.7	400 W	2	ET18	Metal Halide
30 1/2 / 774.7	900 W	1	T3	Halogen(Double Ended)
30 1/2 / 774.7	1000 W	1	T3	Halogen(Double Ended)

LAMP  
(not to scale)

